


DOC NO	ISSUE	REVISION	PRODUCT REF.	DATE	QUALITY PLAN
QF/RDT/03	01	00	PN42(02)(AS)	16.09.20	
TECHNICAL DATA SHEET				SIGNATURE	
				HOD (TPD)	

FULL BODY HARNESS (PN42(02)(AS))

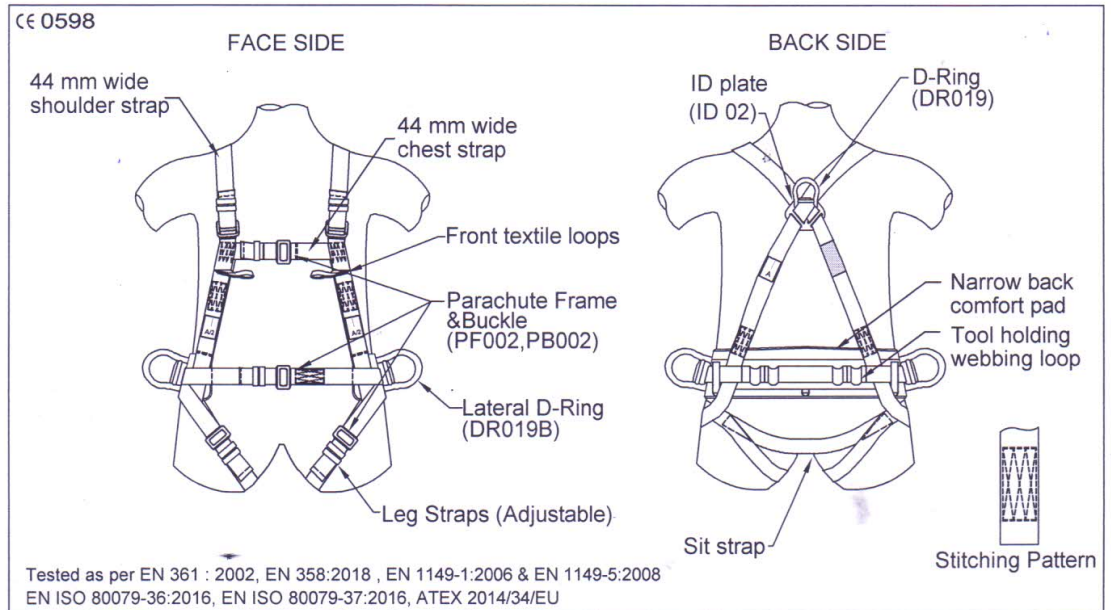

DESIGN

- One dorsal attachment D-ring for fall arrest.
- Front textile loops for fall arrest
- Two lateral D-rings at waist for positioning.
- Adjustable shoulder & leg straps to enhance user ergonomics.
- Comfort padding at the back , leg straps & waist to enhance user ergonomics.
- Sit strap

WEBBING

- Antistatic Polyester Webbing : It prevents the risks of an electrostatic discharge igniting the explosive atmosphere.
- Material : Antistatic Polyester
- Width : 44±1mm
- Breaking strength : 25 KN (Min)

STITCHING THREAD

- Material : High-tenacity polyester.

METAL COMPONENTS

- Material : High Strength steel.
- Finish : Natural silver polished

VITAL TEST COMPLIANCE

- Static Strength : 15 KN or 1,530 kgf for 3 minutes at each attachment element.
- Dynamic Strength : Free fall from 4 meters height donned to a test dummy weighing 140 Kg at each attachment element.

WEIGHT

- : 1750gm ±10 gm.